



Title	Dynamic response mitigation of floating wind turbine platforms using tuned liquid column dampers
Authors(s)	Jaksic, Vesna, Wright, C.S., Murphy, J., Pakrashi, Vikram, et al.
Publication date	2015-02-28
Publication information	Jaksic, Vesna, C.S. Wright, J. Murphy, Vikram Pakrashi, and et al. "Dynamic Response Mitigation of Floating Wind Turbine Platforms Using Tuned Liquid Column Dampers." The Royal Society, February 28, 2015. https://doi.org/10.1098/rsta.2014.0079 .
Publisher	The Royal Society
Item record/more information	http://hdl.handle.net/10197/10411
Publisher's statement	All rights reserved.
Publisher's version (DOI)	10.1098/rsta.2014.0079

Downloaded 2026-05-01 23:43:57

The UCD community has made this article openly available. Please share how this access benefits you. Your story matters! (@ucd_oa)



© Some rights reserved. For more information

Dynamic response mitigation of floating wind turbine platforms using tuned liquid column dampers

V. Jaksic^{1,2}, C. S. Wright¹, J. Murphy¹, C. Afeef^{3,4}, S. F Ali⁴, D.P. Mandic⁵ and V. Pakrashi^{2*}

¹Hydraulics and Maritime Research Centre (HMRC), School of Engineering, University College Cork, Youngline Industrial Estate, Pouladuff Rd, Cork, Ireland

²Dynamical Systems and Risk Laboratory, Civil and Environmental Engineering, School of Engineering, University College Cork, College Road, Cork, Ireland

³Department of Ocean Engineering, Indian Institute of Technology Madras, India

⁴Department of Applied Mechanics, Indian Institute of Technology Madras, India

⁵Department of Electrical and Electronic Engineering, Imperial College London, London, UK

In this paper we experimentally study and compare the effects of three combinations of multiple tuned liquid column dampers (MTLCD) on the dynamic performance of a model offshore wind, floating tension leg platform (TLP) structure in a wave basin. The structural stability and safety of the floating structure during operation and maintenance is of concern for the performance of a renewable energy device that it might be supporting. The dynamic responses of the structure should thus be limited for these renewable energy devices to perform as intended. This issue is particularly important during the operation of a TLP in extreme weather conditions. Tuned liquid column dampers (TLCD) can use the power of sloshing water to reduce surge motions of a floating TLP exposed to wind and waves. This paper demonstrates the potential of MTLCDs in reducing dynamic responses of a scaled TLP model through an experimental study. The potential of using output only statistical markers for monitoring changes in structural conditions is also investigated through the application of a Delay Vector Variance (DVV) marker for different conditions of control for the experiments.

Subject Areas:

New Perspectives in Offshore Wind Energy – *special issue*

Keywords:

Offshore wind energy; Tension leg platform (TLP); Structural dynamics; Wave induced vibrations, Surge motions, Tuned liquid column damper (TLCD).

Author for correspondence:

V. Pakrashi

e-mail: V.Pakrashi@ucc.ie

1. Introduction

A Tension Leg Platform (TLP) is a floating platform connected to the seabed by vertical tendons or tethers. The tendons are kept in tension due to the buoyancy of the platform. This pre-tension is designed to keep the tendons under tension in all circumstances, even in large waves conditions [1]. The stiff connection of the platform with the seabed minimises the vertical motions and gives the platform a short natural period outside of typical sea conditions (typically 2-4s) [2, 3]. However, a TLP is not constrained dynamically in the horizontal direction and the drift motions (surge, sway and yaw motion) of the platform due to the action of coupled wind – wave forces can be significant during extreme weather conditions [3-5]. These motions can influence the performance of a wind turbine, the accessibility during its operation and maintenance (O&M) and ultimately the levelised cost of energy (LCOE)[6, 7]. Incorporation of damping devices to the structure has been suggested to reduce these types of responses [2, 8-10].

A reasonable method to reduce vibrations of floating platforms is through the use of structural control devices typically employed in civil structures [10-13,14]. Among many types of structural control devices traditionally available, Tuned Liquid Dampers (TLDs) may be favourable for application in the offshore floating wind energy devices for their relatively high performance and low cost [15-17]. Tuned Liquid Column Damper (TLCD) is a type of TLD that relies on the motion of liquid column in a U-shaped tube to counteract the action of external forces imposed to the structure. The energy dissipation in the water column is due to the passage of liquid through orifice with inherent head-loss characteristics [8, 18]. The overall damping in a TLCD is nonlinear due to the quadratic damping term [19]. TLCD has been found to be effective for vibration control when a structure is exposed to wind and/or earthquake loading [14, 16, 17, 20]. Yalla and Kareem [19] used the theory of TLCD and developed an equivalent linearization scheme to compute the optimum head loss coefficient for a given wind or seismic excitation in a single step. They used a single degree of freedom system exposed to white noise and a set of filtered white noise load, representing the broadband wind and seismic loading, to determine numerically the optimal damping coefficient and tuning ratio of a TLCD.

Lee et al. [8] studied, numerically and experimentally, a typical pontoon type offshore floating platform with a TLCD. They varied the diameter and the draft of the pontoon as well as the mass of the platform structure in order to evaluate dynamic response mitigation through incorporation of TLCD. They found that, as long as the parameters were tuned appropriately according to the properties of the main structure, the TLCD exhibited a good performance. They presented analytical evaluation of the pontoon structure motion reduction and experimental response comparison in time and frequency domain of the platform with and without TLCD based on the experiments on a small model in a wave flume. The analytical results show that the energy dissipated from the TLCD device may reach a value of up to 70% (and in most cases over 50%), while the variation of the draft and dimension parameters indicate the influence of these parameters on the performance of TLCD. The preliminary experiment results show that this device could be effective for vibration suppression for the floating platform. However, experimentation for larger models and for larger depths of water is required for such platforms along with experimental studies utilising ocean wave spectra. Gao et al. [21] studied the effects of the multiple tuned liquid column dampers (MTLCD) in suppressing structural vibrations. They found that the frequency range and the coefficient of head loss may have significant effects on the performance of a MTLCD and that increasing the number of TLCDs can enhance the efficiency of the MTLCD. They showed that an optimised MTLCD is even more sensitive to the coefficient of head loss (or damping) than a single TLCD. However, in order to maintain the same level of efficiency as an optimised single TLCD, MTLCD offers much wider choices in both frequency ratio and coefficient of head loss. In this sense, a MTLCD is more robust than a single TLCD. Experimental studies for MTLCD in this regard for floating platforms have not been done.

This study expands the work of Lee et al. [8] experimentally and combines it with the theoretical concept of Gao et al. [21] through numerical and experimental results related to the effects of MTLCD on the dynamic responses of a TLP structure. The experiments were carried out in a wave basin on a Froude scaled (1:50) TLP equipped with MTLCD and capable of supporting a wind turbine structure. Individual TLCDs were designed using the principles described in Yalla and Kareem [19], where the total length of the water column was obtained by equalising peak of an irregular wave frequency with water column frequency. The effect on the structural response of three combinations of two different TLCD designs are tested and compared. The MTLCD combinations relate to three $\pm 5\%$ (MTLCD1), three $\pm 10\%$ (MTLCD2), and two $\pm 5\%$ and one $\pm 10\%$ (MTLCD3) damper to TLP mass ratio (μ). Dynamic responses of the TLP for closed (inactive) and open (active) MTLCD were investigated with the presence and absence (represented as 'thrust' and 'no thrust' conditions respectively) of mechanically simulated equivalent wind loads at the nacelle. The dynamic response of the TLP was monitored

at different locations using load cells and a camera based motion recognition system. The structure was exposed to scaled sea states characterized by the Joint North Sea Wave Observation Project – JONSWAP (JS) spectra. The percentage of force change in the mooring tendons and percentage change of displacement responses were computed for various combinations and designs of MTLCD in the presence of varying wave characteristics. A Delay Vector Variance method was tested as a potential output only statistical marker for monitoring structural changes. The results of this study are encouraging and form the basis for further prototype testing and investigation of MTLCD application in offshore wind energy substructure motion mitigation along with the development of output only statistical markers for monitoring such devices.

2. Experimentation and numerical modelling

(a) TLP Model with Tuned Liquid Column Damper (TLCD)

The TLP platform tested (Figure 1) is a Truss type structure with a floating hexagonal platform connected with six mooring tethers to a large circular gravity base which sits on the bottom of the wave basin. The model is scaled according to the Froudian scaling laws and has a scale factor of 50, [22, 23]. The floating hexagonal platform consists of the buoyancy ring and the upper structure. The buoyancy ring consists of six 90mm diameter Polyvinyl chloride (PVC) pipes, joined to the central column by six 40mm diameter PVC pipes. Situated above the buoyancy ring is the upper structure, fabricated from 40mm diameter PVC pipe, which is joined to the buoyancy ring by six 40mm diameter sections of pipe, and to the central column by six 40mm diameter PVC pipes. The upper structure provides no buoyancy as it is not submerged. The central column is fabricated from 160mm diameter PVC pipe and provides sufficient buoyancy to counteract the weight of the tower and nacelle. The excess buoyancy force is passed to the six mooring lines made of 2mm diameter stainless steel wire to ensure that they remain in tension at all times. The weight of the TLP is 16.8kg. The wind turbine tower is 1.15m high 50mm diameter PVC pipe (0.8kg) with the 2.2kg horizontal thrust load simulating the average effects of wind. Three U-shape TLCD devices are attached to the upper structure at the level of the center of the gravity (CG). The middle length TLCD1 is designed following Yalla and Kareem [19] and is tuned to the average frequency of the longest JS waves the basin can generate (0.59Hz). The other two TLCDs longer (TLCD2) and shorter (TLCD3) are tuned for neighbouring frequencies, 0.70Hz and 0.53Hz, respectively, in order to cover a wider spectrum. The effects of the three combinations of two TLCD designs on the behaviour of the structure were studied. In the first case of TLCD design the mass ratio, μ (ratio of mass of liquid in the tube, m_d^* , to mass of the primary system, M_s) was 5%, and in the second case 10%, with pipe diameter 30mm and 40mm, respectively. The design characteristics of TLCDs are shown in Table 1, while the combinations tested are shown in Table 2. Since the higher weight of the MTLCD in MTLCD2 cause instability of the TLP due to the reduction in the tendon loads, additional 17L buoyancy is added to the platform. The added buoyancy is kept through the entire experimentation in order to get comparable results. The experimental set up of TLP is shown in Figure 1a, while the gravity base with load cell arrangement and position of TLCD in relation to the incident wave direction is shown in Figure 1b.

Table 1. TLCD designs

TLCD	Tuned frequencies (Hz)	Length of TLCD Ld (m)	Horizontal Length Bd (m)	Vertical Length Vd (m)	Vertical Length extension Vd ^{E*} (m)
TLCD1	0.596	1.4	1.0	2.0	0.4
TLCD2	0.705	1.8	1.3	2.5	0.5
TLCD3	0.525	1.0	0.7	1.5	0.3

*The length to prevent loss of water

Table 2. MTLCD designs

COMBINATION S	Mass ratio μ (%)	TLCD 1	TLCD 2	TLCD 3
MTLCD1	5	✓	✓	✓
MTLCD2	10	✓	✓	✓
MTLCD3	5		✓	✓

	10	✓		
--	----	---	--	--

(b) Instrumentation

The performance of the TLP system equipped with TLCD device was tested for various wave conditions in a wave basin and recordings were made using six load cells, two water level probes, and four motion capture cameras. Six load cells measured the tension in Newtons in each of the mooring lines. The load cells were Tedeo-Huntleigh stainless steel single ended bending beam load cells with a maximum load of ~50N and were bolted to the gravity base (Figure 1b). Each load cell was given a colour code (name) during the testing, i.e. White, Red, Blue, Yellow, Brown, and Green were located at Bow Port, Bow Starboard, Amidships Port, Amidships Starboard, Stern Port, and Stern Starboard, respectively. Two water level probes measured water surface elevations (millimetres) during testing. In order to measure the motions of the TLP, four reflective markers were attached to the corners of the hexagonal base (Figure 1a). The instantaneous positions of the markers were monitored by the Qualisys 3-Series Oqus Marker Tracking Cameras with a sampling frequency of 32Hz. The load cells and wave probes were triggered by the National Instruments Labview 2011 Version 11.0 software. The Qualisys Marker Tracking system was time synchronised using Labview.

(c) Experimental Procedure

The model testing was carried out in a wave basin equipped with 40 flap type paddles capable of generating sinusoidal wave profiles as well as 2 and 3-D wave spectra. The still water depth is constant at 1.0m. The TLP was tested for JS spectra with wave period T_p as 2.4s, and Froude scaled wave amplitudes, H_s for 0.015, 0.02, 0.025, 0.03 and 0.035m. The test schedule is shown in Appendix A as an Electronic Supplementary Material. A scaled mass was attached to the top of the mast to represent the loading of a wind turbine nacelle in no wind conditions. The TLP was fitted with MTLCDs and four different setups of the damping device were tested as indicated in Table 2 for active and inactive conditions of the damper. Effects of reflected waves at the boundaries of the basin were removed by absorbing barriers and an inbuilt active absorption system in the wave flaps.

(d) Numerical analysis

In order to provide a basis for the experiments, numerical modelling of a TLP with a TLCD and MTLCDs was performed based on work of Gao et al. [21] and Farshidianfar [24] respectively. The response of the structure with TLCD with different densities of working fluids as multiples of density of water was investigated in these simulations. The coding of the observed single and multiple TLCD cases on TLP excited by the random force was done using Matlab [25]. In the first part of numerical simulations, the changes in responses of the system were due to the changes of the mass of the damper, which was simulated by using different fluids with different density values and keeping all other parameters of the damper constant. Frequency responses were found for various values of density of the damping liquid/density of the water (md^*), varying from 2 to 6. Responses in frequency domain were compared with responses which were obtained without the use of TLCD dampers. In the second part of the analysis, time history responses of the structure were obtained by using random forcing obtained from Pierson-Moskowitz spectrum with $U_{15.4}=20$ m/s and employing the following equation with $\alpha=0.0081$, $\beta=0.74$ and $\omega_0 = g/U_{15.4}$

$$s(\omega) = \frac{\alpha g^2}{\omega^5} e\left(-\beta \left(\frac{\omega_0}{\omega}\right)^4\right) \quad (1)$$

Numerical analysis of the results obtained from the experiments is carried out using the Delay Vector Variance (DVV) [26] method. DVV is employed as a statistical marker to track structural changes in the system using only the dynamic responses of the platform and due to the presence of various designs of MTLCD. DVV is based on surrogate data methodology, elaborated in detail by Schreiber and Schmitz [27], for detecting the determinism and nonlinearity in a time series. DVV method is explained and further elaborated and tested in Gautama et al. [28-30] and Mandic et al. [31]. A separate paper in this issue tests DVV for floating platforms and the potential of its use for tracking changes in structural properties is identified there. Advantages of using this method relate to the facts that it does not require any prior knowledge about the system or the excitation, is robust to the presence of noise, straightforward to interpret and typically exhibits improved performance over other traditionally available methods [30]. Numerical analyses were performed using the DVV Toolbox [32]. The output of the

method is one number for each response signal recorded represented by the Root Mean Square Error (RMSE) and represents the degree of nonlinearity of the response [30]. In all DVV analyses following parameters were kept constant: the embedding dimension $m=3$, time lag $\tau=1$, the maximal span parameter is $n_d=2$, the number of standardised distances for which target variances are computed is $N_{tr}=50$, number of surrogates considered is $N_{tr}=50$, and the number of reference DVs considered is $N_{sub}=200$. Discussions related to the choice of these parameters and computation of DVV is already reported by Jaksic *et al.* this volume.

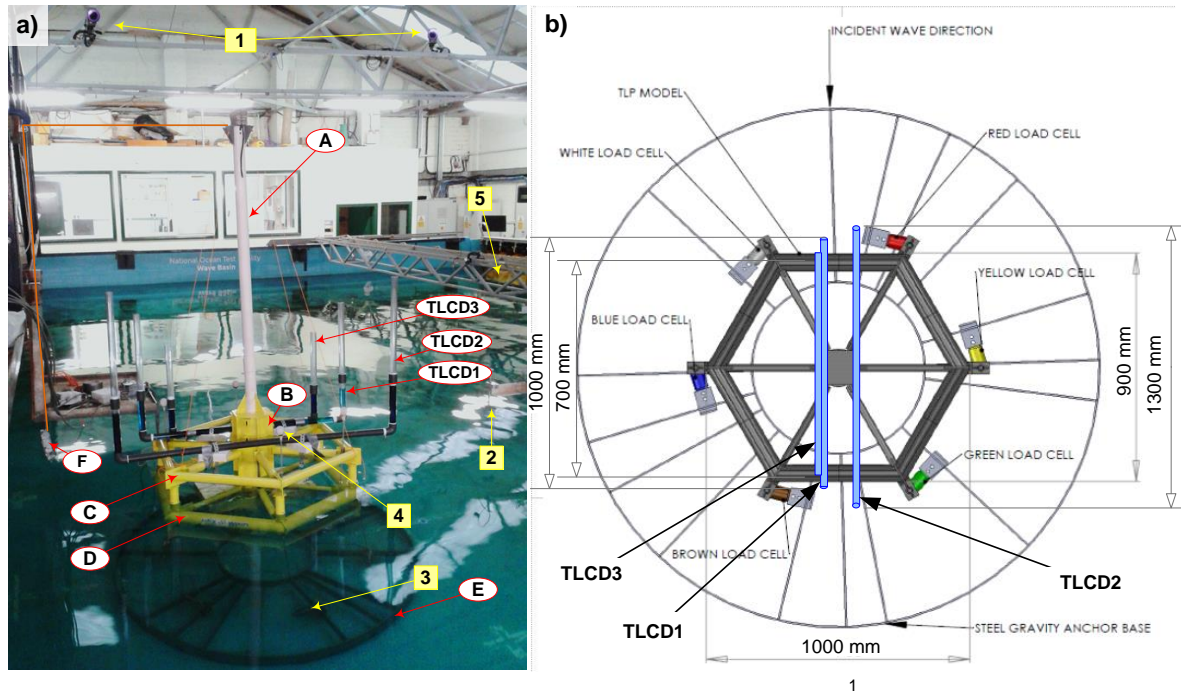


Figure 2. a) 1:50 Scale Model of Truss type TLP Platform experimental setup: (A) mast, (B) central column, (C) upper structure, (D) buoyancy ring, (E) gravity base, and (F) thrust load. The locations of devices used: (1) motion cameras, (2) wave probes, (3) load cells, (4) reflective motion markers, and (5) flap type wave-maker; b) TLP view from above: position of MTLCD and gravity base with load cell arrangement in relation to the incident wave direction.

3. Results and Discussion

The TLP was excited by wave spectrum of single peak frequency for 5 minutes in each test during which time the responses of the various load cells reached stable and repeatable peaks. The results of this experimental work along with the numerical modelling results and example of DVV analysis are presented in Figure 2. An example of raw data is given in Appendix B as an Electronic Supplementary Material.

The comparison of the surge energy measured by yellow load cell when the system is damped by MTLCD3 is shown in Figure 2a. The figure shows the comparison between two different sea states, when H_s is 15 and 35mm respectively for conditions when the damper is inactive (closed) and active (open). The results show that the surge energy decreases when a TLCD is installed to the structure and this is in agreement with Lee *et al.* [8]. A comparison related to the maximum surge displacement is shown in Figure 2b. The greatest reduction in maximum surge displacement is achieved (10-16%) for MTLCD2 for active dampers. The results are extremely consistent across all wave heights for MTLCD2 and MTLCD3, with some variance for MTLCD1 (2% increase – 10% reductions.) It should be noted that in the lower wave heights the thrust load is dominating, resulting in the variance between results with and without thrust applied. In the larger wave heights, wave loading is dominating, resulting in agreement between results. Figure 2c shows the results of the mooring tension comparison of representative (yellow) load cell measurements. The MTLCD2 design again shows the most promising results and the results are extremely consistent over the range of wave heights tested.

The numerical modelling of effect of MTLCD on the TLP is performed in two parts. In the first part the wave frequency (forcing frequency) is varied from zero to 5 rad/sec, where the maximum response is found. This was done for different working fluid densities and for each combination of dampers. The frequency response analysis for MTLCD1 design shows that changing density of operating fluid does not significantly impact the structure response. For MTLCD2 design, responses with density ratio 1, 2 and 3 are almost the same. Beyond this, the dominant reduction in dynamic response is only with density ratio 5, which may not be practical for implementation. Similar results are obtained for MTLCD3 design. The results for numerical simulations of MTLCD1 and MTLCD3 designs are not presented here as they only show this response comparison with water as the operating fluid. For illustration, Figure 2d shows the maximum response plotted against the forcing frequency for the MTLCD2 design. Reduction in responses decreases as md^* increases up to 4 and then it increases. Minimum dynamic response is observed when md^* is between 3 and 4. In the second part of the numerical simulations, the dynamic responses to a random forcing are observed and the responses for each combination of MTLCDs with water as working fluid are investigated. The forcing function was obtained using equation (1). It is observed that the damping rate is low in multiple TLCD as compared to single TLCD. It will take more time for TLP with MTLCD to come to rest after a random forcing as compared to TLP with single TLCD. The decrease in the response frequency due to the presence of a damper is shown in Figure 2e. The frequency reduction is up to five times when MTLCD are active.

The results of DVV analysis of the surge motion of the TLP platform are shown in Figure 2f. The results show that the RMSE for the platform motion when the thrust is present decreases as the H_s increases. There is almost no difference in the degree of nonlinearity of the surge motions of the platform with active and inactive MTLCD when thrust loading is present. Similarly, the platform with no thrust loading has almost constant nonlinearity degree of response regardless of the wave height. This is in the agreement with the earlier findings that the TLP platform with MTLCD1 has high pretension and is stiff in lower wave conditions. On the other hand when there is no thrust loading TLP surge response nonlinearity is lowered when MTLCD is active.

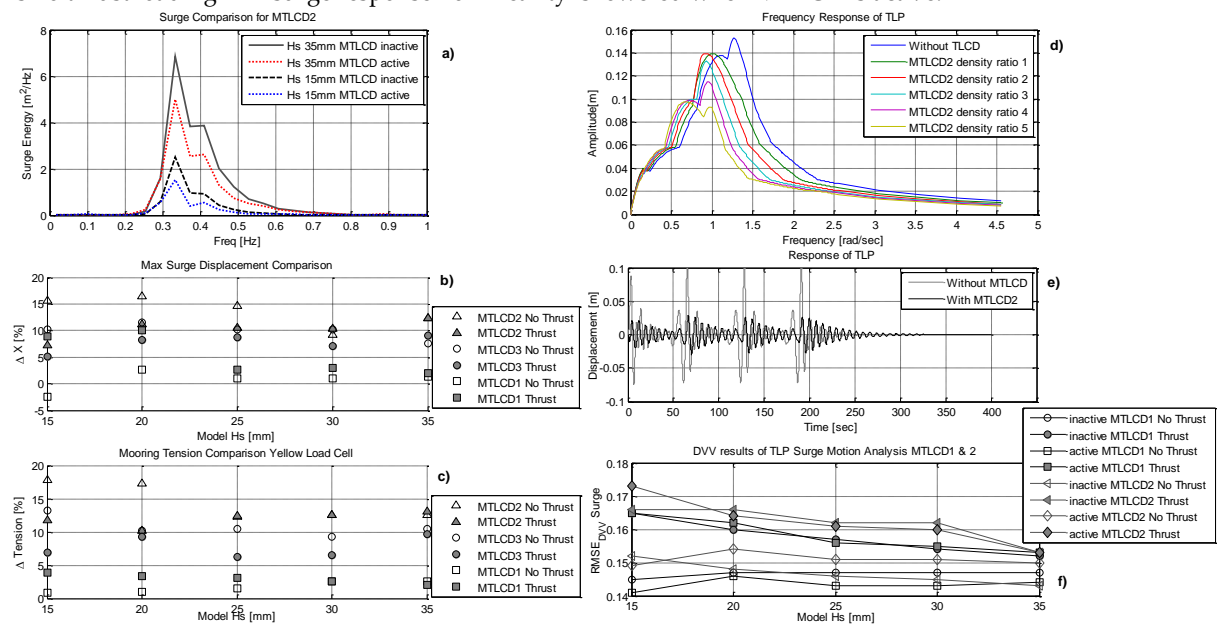


Figure 2. a) Yellow load cell: frequency vs. surge energy for active and inactive MTLCD2 case for $H_s=15$ and 35mm ; b) Maximum surge displacement comparison; c) Mooring tension comparison for Yellow load cell; Numerical modelling: d) frequency response of TLP without TLCD and with MTLCD2 for different fluid density ratio; e) Frequency response comparison of TLP with MTLCD2 and without MTLCD; f) DVV results of surge motion analysis for TLP with MTLCD1 and MTLCD2.

4. Conclusions

This paper has investigated by both numerical modelling and experimental testing methods, the effectiveness of MTLCD for reducing motions in TLP type offshore floating wind platforms. The physical model testing used simulated ocean wave spectra and showed that MTLCD can be used to reduce the dynamic responses of the TLP platform. Furthermore, the results also indicate the positive effect of MTLCD on tensile forces experienced by

mooring lines. The numerical modelling presented confirmed these findings. The work undertaken highlights the importance of using larger scaled model testing in more realistic conditions to assess control or monitoring strategies and designs for full scale deployment. Small scale models do not necessarily capture certain complexities and challenges related to the mitigation of dynamic responses of offshore renewable energy device platforms. These experiments also indicate that to achieve an optimal arrangement for the control of dynamic responses of TLPs, a significant range of adjustment is required to be carried out frequently over the lifespan of structure. However, if the sea state spectra are known for intended operational conditions, an approximate tuning can result in mitigation of dynamic responses that are non-optimal but adequately close to the optimal mitigation for engineering purposes. The numerical modelling shows that there may be benefit in using MTLCD over using one TLCD. Finally, the use of DVV in monitoring different structural conditions highlight the potential of developing output only statistical markers monitoring dynamic behavioural changes in these devices.

Acknowledgement. The authors would like to express their gratitude to Mr Thomas Walsh, Mr Niall O'Sullivan and Mr Florent Thiebaut, for their help with setting up the experiments reported in this paper. The authors would also like to acknowledge Marine Research Energy Ireland (MaREI), grant number 12/RC/2302, a Science Foundation Ireland (SFI) supported project and SFI Advance award 14/ADV/RC3022.

References

- [1] Wang, C.M., T. Utsunomiya, S.C. Wee, and Y.S. Choo. 2010. Research on floating wind turbines: a literature survey. *The IES Journal Part A: Civil & Structural Engineering*. **3**(4): 267-277. (DOI 10.1080/19373260.2010.517395).
- [2] Rustad, A.M., 2007. *Modeling and Control of Top Tensioned Risers*. Department of Marine Technology, Norwegian University of Science and Technology. Thesis for the degree of philosophiae doctor.
- [3] Qiu, W., H. Lie, J.-M. Rousset, D.-Y. Lee, S.H. Sphaier, L. Tao, X. Wang, T. Mikami, and V. Magarovskii. 2014. *Report of the Ocean Engineering Committee - ITTC*. The International Towing Tank Conference Copenhagen.
- [4] Lefebvre, S. and M. Collu. 2012. Preliminary design of a floating support structure for a 5MW offshore wind turbine. *Ocean Engineering*. **40**(0): 15-26. (DOI 10.1016/j.oceaneng.2011.12.009).
- [5] Emmerhoff, O.J., 1994. *The slow drift motions of offshore structures*. Dept. of Ocean Engineering, Massachusetts Institute of Technology. DhD in Hydrodynamics(32156561): p. 131.
- [6] Butterfield, S., W. Musial, J. Jonkman, P. Sclavounos, and L. Wayman. 2005. Engineering Challenges for Floating Offshore Wind Turbines. Proceedings of the *Proceedings Copenhagen Offshore*. Copenhagen, Denmark.
- [7] Maples, B., G. Saur, M. Hand, R.v.d. Pietermen, and T. Obdam. 2013. *Installation, Operation, and Maintenance Strategies to Reduce the Cost of Offshore Wind Energy*. NREL/TP-5000-57403 National Laboratory of the U.S. Department of Energy; Office of Energy Efficiency & Renewable Energy Operated by the Alliance for Sustainable Energy, LLC. Denver, USA.
- [8] Lee, H.H., S.H. Wong, and R.S. Lee. 2006. Response mitigation on the offshore floating platform system with tuned liquid column damper. *Ocean Engineering*. **33**(8-9): 1118-1142. (DOI 10.1016/j.oceaneng.2005.06.008).
- [9] Karimi, H.R., M. Zapateiro, N.S. Luo, and Ieee. 2010. Semiactive vibration control of offshore wind turbine towers with Tuned Liquid Column Dampers Using H-infinity Output Feedback Control. *2010 Ieee International Conference on Control Applications*: 2245-2249. (DOI 10.1109/cca.2010.5611186).
- [10] Diana, G., F. Resta, D. Sabato, and G. Tomasini. 2013. Development of a methodology for damping of tall buildings motion using TLCD devices. *Wind and Structures*. **17**(6): 629-646.
- [11] Housner, G., L. Bergman, T. Caughey, A. Chassiakos, R. Claus, S. Masri, R. Skelton, T. Soong, B. Spencer, and J. Yao. 1997. Structural Control: Past, Present, and Future. *Journal of Engineering Mechanics*. **123**(9): 897-971. (DOI 10.1061/(ASCE)0733-9399(1997)123:9(897)).
- [12] Al-Saif, K.A., K.A. Aldakkan, and M.A. Foda. 2011. Modified liquid column damper for vibration control of structures. *International Journal of Mechanical Sciences*. **53**(7): 505-512. (DOI 10.1016/j.ijmecsci.2011.04.007).
- [13] Sadek, F., B. Mohraz, and H.S. Lew. 1996. *Single and multiple tuned liquid column damper*. NISTIR 5920 Building and Fire research Laboratory, National Institute of Standards and Technology Gaithersburg, Maryland.
- [14] Gowda, K.K. and K.K. Kiran. 2013. Earthquake resistance of structures using dampers-a review. *International Journal of Advanced Structures and Geotechnical Engineering*. **2**(1).
- [15] Roderick, C., 2012. *Vibration Reduction of Offshore Wind Turbines Using Tuned Liquid Column Dampers*. Mechanical Engineering, University of Massachusetts Amherst. Master of Science in Mechanical Engineering (M.S.M.E.): p. 92.
- [16] Symans, M.D. and M.C. Constantinou. 1999. Semi-active control systems for seismic protection of structures: a state-of-the-art review. *Engineering Structures*. **21**(6): 469-487. (DOI 10.1016/S0141-0296(97)00225-3).
- [17] Colwell, S. and B. Basu. 2009. Tuned liquid column dampers in offshore wind turbines for structural control. *Engineering Structures*. **31**(2): 358-368. (DOI 10.1016/j.engstruct.2008.09.001).
- [18] Yalla, S.K., A. Kareem, and J.C. Kantor. 2001. Semi-active tuned liquid column dampers for vibration control of structures. *Engineering Structures*. **23**(11): 1469-1479. (DOI 10.1016/S0141-0296(01)00047-5).
- [19] Yalla, S. and A. Kareem. 2000. Optimum Absorber Parameters for Tuned Liquid Column Dampers. *Journal of Structural Engineering*. **126**(8): 906-915. (DOI 10.1061/(ASCE)0733-9445(2000)126:8(906)).

- [20] Won, A.Y.J., J.A. Pires, and M.A. Haroun. 1996. Stochastic seismic performance evaluation of tuned liquid column dampers. *Earthquake Engineering & Structural Dynamics*. **25**(11): 1259-1274.
- [21] Gao, H., K.S.C. Kwok, and B. Samali. 1999. Characteristics of multiple tuned liquid column dampers in suppressing structural vibration. *Engineering Structures*. **21**(4): 316-331. (DOI 10.1016/S0141-0296(97)00183-1).
- [22] Jain, A., A.N. Robertson, J.M. Jonkman, A.J. Goupee, R.W. Kimball, and A.H.P. Swift. 2012 FAST Code Verification of Scaling Laws for DeepCwind Floating Wind System Tests. in *22nd International Offshore and Polar Engineering Conference*. Rhodes, Greece. NREL.
- [23] Robertson, A.N., J.M. Jonkman, M.D. Masciola, P. Molta, A.J. Goupee, A.J. Coulling, I. Prowell, and J. Browning. 2013 Summary of Conclusions and Recommendations Drawn from the DeepCwind Scaled Floating Offshore Wind System Test Campaign. in *ASME 2013 32nd International Conference on Ocean, Offshore and Arctic Engineering*. Nantes, France. NREL.
- [24] Farshidianfar, A., P. Oliazadeh, and H.R. Farivar. 2009. Optimal Parameter's Design in Tuned Liquid Column Dampers. Proceedings of the *17th. Annual (International) Conference on Mechanical Engineering-ISME2009*. University of Tehran, Iran.
- [25] 2004 *MATLAB 7*, The MathWorks, Inc. Natick, MA
- [26] Mandic, D.P. and J.A. Chambers. 2001 *Recurrent Neural Networks for Prediction: Learning Algorithms, Architectures and Stability*, ed. S. Haykin: John Wiley & Sons, Ltd. (DOI 10.1002/047084535X).
- [27] Schreiber, T. and A. Schmitz. 2000. Surrogate time series. *Physica D: Nonlinear Phenomena*. **142**(3-4): 346-382. (DOI 10.1016/s0167-2789(00)00043-9).
- [28] Gautama, T., D.P. Mandic, and M.M.V. Hulle. 2003. Signal Nonlinearity in fMRI: A Comparison Between BOLD and MION. *IEEE Transactions on Medical Imaging*. **22**(5): 636 - 644.
- [29] Gautama, T., D.P. Mandic, and M.M.V. Hulle. 2004. The delay vector variance method for detecting determinism and nonlinearity in time series. *Physica D: Nonlinear Phenomena*. **190**(3-4): 167-176. (DOI 10.1016/j.physd.2003.11.001).
- [30] Gautama, T., D.P. Mandic, and M.M.V. Hulle. 2003. Indications of nonlinear structures in brain electrical activity. *Physical Review E*. **67**(4): 046204 (5). (DOI 10.1103/PhysRevE.67.046204).
- [31] Mandic, D.P., M. Chen, T. Gautama, M.M. Van Hulle, and A. Constantinides. 2008. On the characterization of the deterministic/stochastic and linear/nonlinear nature of time series. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Science*. **464**(2093): 1141-1160. (DOI 10.1098/rspa.2007.0154).
- [32] Mandic, D.P. 2010 *Delay Vector Variance MATLAB Toolbox*. Available from: <http://www.commsp.ee.ic.ac.uk/~mandic/dvv.htm>.