



Research Repository UCD

Title	Modelling the vehicle in vehicle-infrastructure dynamic interaction studies
Authors(s)	Cantero, Daniel, O'Brien, Eugene J., González, Arturo
Publication date	2010
Publication information	Cantero, Daniel, Eugene J. O'Brien, and Arturo González. "Modelling the Vehicle in Vehicle-Infrastructure Dynamic Interaction Studies." Professional Engineering Publishing / SAGE Publications Ltd, 2010. https://doi.org/10.1243/14644193JMBD228 .
Publisher	Professional Engineering Publishing / SAGE Publications Ltd
Item record/more information	http://hdl.handle.net/10197/2551
Publisher's statement	All rights reserved
Publisher's version (DOI)	10.1243/14644193JMBD228

Downloaded 2025-12-04 22:43:56

The UCD community has made this article openly available. Please share how this access benefits you. Your story matters! (@ucd_oa)



© Some rights reserved. For more information

Modelling the Vehicle in Vehicle-Infrastructure Dynamic Interaction

Studies

D. Cantero^{a*}, E.J. OBrien^a and A. González^a

^aSchool of Architecture, Landscape and Civil Engineering, University College

Dublin, Ireland

*Corresponding author. Email: canterolauer@gmail.com

Abstract

This paper presents the equations of motion for a general articulated road vehicle, with variable numbers of wheels for the tractor and trailer. The equations are applicable to vehicle-infrastructure dynamic interaction problems for two- and three-dimensional systems, allowing for the definition of a wide variety of vehicle configurations with the same formulae.

Keywords: vehicle forces; equations of motion; dynamics; articulated truck; bridge; pavement

1. Introduction

The complexity of mathematical models used to describe vehicle dynamics varies with the purpose of the research and the expected level of accuracy. In the case of the

dynamic interaction between a vehicle and the infrastructure, the equations of motion of the vehicle [1] and the equations governing the bridge or pavement response can be defined separately and then, combined together to guarantee equilibrium and compatibility of displacements at the contact points [2, 3]. For this purpose, a vehicle can be modelled as a single vertical force [4] or as a series of constant forces [5, 6] in its most simple form. However, with the advance in computational power, vehicle models are now commonly idealised as single Degrees Of Freedom (DOF) [7], two DOF's [8-10] or multiple DOF's [1, 11-13] made of linear, mass and rigid elements. Some researchers have included a hinge to model an articulation between tractor and trailer [14-17], or have even modelled vehicles with towed trailers [18]. Vehicle models made of plane and volume finite elements have been developed [19] allowing for a detailed representation of the vehicle aerodynamic forces, strains and deformations. However, it seems unlikely that vehicle deformations could significantly affect the levels of dynamic stresses in the infrastructure. So, models made of linear elements have been shown to offer sufficient accuracy to analyse the influence of vehicle forces on the infrastructure [1, 20]. The objective of this paper is to facilitate a general form of the vehicle equations that can be easily extended to any specified number of axles or wheels in the tractor and/or trailer, in planar or three-dimensional vehicle-infrastructure interaction problems.

This paper presents the equations of motion for a general road vehicle, condensed into one single system of second order differential equations. These equations can be easily implemented in a computer model and solved using any standard integration scheme, such as Runge-Kutta [21], Newmark- β [22], Wilson- θ [23] or the exponential method [24] among others. The proposed vehicle model consists of two major

bodies, tractor and trailer, represented as lumped masses joined to the road or bridge surface by spring-dashpot systems, which model the suspension and tyre mechanisms (Figure 1). Each axle is represented as a rigid bar with lumped masses at both ends that correspond to the wheel and suspension masses (Figure 2). In addition, each wheel is connected to the road surface by another spring-dashpot system that imitates the tyre response. With the equations of motion presented here it is possible to define any number of axles for tractor and trailer, reduce the model to a tractor only vehicle, or downgrade from a three-dimensional to a planar vehicle model. Hence the equations can be used to model any vehicle configuration from a quarter-car to a multi-axle articulated truck.

2. Equations of motion of the vehicle

The model assumes vertical tyre-ground contact forces at single points, constant vehicle speed, driving path in a straight line, and negligible lateral and yaw motions. Horizontal forces are not considered and as result, the model is not applicable to the analysis of vehicles with varying speed or curved infrastructure where centrifugal forces could play an important role. Therefore, the equations have been derived for mechanical elements with linear stiffness and damping properties. The motion of the entire system is defined by the tractor sprung mass vertical displacement y_T , pitch θ_T and roll γ_T rotations, the trailer pitch θ_S and roll γ_S , and one additional vertical displacement for each considered wheel y_i . Note that, due to the articulation between the tractor and trailer, there is a geometric relationship given by equation (1), resulting in one dependent degree of freedom, i.e., the trailer vertical displacement y_S , which can be expressed in terms of the system rotations and tractor vertical displacement [25].

$$y_S = y_T + h_1 \theta_T + h_3 \theta_S \quad (1)$$

The equations of motion can be derived from equilibrium of forces and moments acting on each mass and they are presented individually in equations (2 - 8). Applying Newton's second law of motion to the tractor sprung mass, the equilibrium of the inertial forces of both sprung masses due to their vertical acceleration, and damping and stiffness forces transmitted by the suspension can be established as in equation (2).

$$\begin{aligned}
 & (m_T + m_S) \ddot{y}_T + m_S h_1 \ddot{\theta}_T + m_T h_3 \ddot{\theta}_S + \\
 & \sum_T [k_i (y_T + b_i \theta_T + a_i \beta_T - y_i) + c_i (\dot{y}_T + b_i \dot{\theta}_T + a_i \dot{\beta}_T - \dot{y}_i)] + \\
 & \sum_S [k_i (y_T + h_1 \theta_T + (b_i + h_3) \theta_S + a_i \beta_S - y_i) + \\
 & c_i (\dot{y}_T + h_1 \dot{\theta}_T + (b_i + h_3) \dot{\theta}_S + a_i \dot{\beta}_S - \dot{y}_i)] = 0 \quad (2)
 \end{aligned}$$

Equations (3) and (4) are the result of applying the law of conservation of angular momentum to the tractor moments of inertia of the pitch and roll motions respectively.

$$\begin{aligned}
 & m_S h_1 \ddot{y}_T + (I_{Ty} + m_S h_1^2 + m h_2^2) \cdot \ddot{\theta}_T + (m_S h_1 h_3 - m h_2 h_4) \ddot{\theta}_S + \\
 & \sum_T b_i [k_i (y_T + b_i \theta_T + a_i \beta_T - y_i) + c_i (\dot{y}_T + b_i \dot{\theta}_T + a_i \dot{\beta}_T - \dot{y}_i)] + \\
 & \sum_S h_1 [k_i (y_T + h_1 \theta_T + (b_i + h_3) \theta_S + a_i \beta_S - y_i) + \\
 & c_i (\dot{y}_T + h_1 \dot{\theta}_T + (b_i + h_3) \dot{\theta}_S + a_i \dot{\beta}_S - \dot{y}_i)] = 0 \quad (3)
 \end{aligned}$$

$$I_{Tx} \ddot{\beta}_T + \sum_T a_i [k_i (y_T + b_i \theta_T + a_i \beta_T - y_i) + c_i (\dot{y}_T + b_i \dot{\theta}_T + a_i \dot{\beta}_T - \dot{y}_i)] = 0 \quad (4)$$

Similarly to the equilibrium of the tractor mass, and taking equation (1) into account, the equations of motion of the trailer are given by equations (5, 6).

$$m_S h_3 \ddot{y}_T + (m_S h_1 h_3 - m h_2 h_4) \ddot{\theta}_T + (I_{Sy} + m_S h_3^2 + m h_4^2) \ddot{\theta}_S + \sum_S (h_3 + b_i) [k_i (y_T + h_1 \theta_T + (h_3 + b_i) \theta_S + a_i \beta_S - y_i) + c_i (\dot{y}_T + h_1 \dot{\theta}_T + (h_3 + b_i) \dot{\theta}_S + a_i \dot{\beta}_S - \dot{y}_i)] = 0 \quad (5)$$

$$I_{Sx} \ddot{\beta}_S + \sum_S a_i [k_i (y_T + h_1 \theta_T + (h_3 + b_i) \theta_S + a_i \beta_S - y_i) + c_i (\dot{y}_T + h_1 \dot{\theta}_T + (h_3 + b_i) \dot{\theta}_S + a_i \dot{\beta}_S - \dot{y}_i)] = 0 \quad (6)$$

The equations for the unsprung masses have been derived considering that the axle is a rigid bar, the masses are lumped at both ends and suspensions are connected to the axle at distances d_i and d_{io} from the wheels, as illustrated in Figure 2. Inertial, suspension and tyre forces acting on each unsprung mass must be in equilibrium. These dynamic equations of equilibrium are slightly different for the unsprung masses of the tractor (7) and unsprung masses of the trailer (8), since the trailer vertical displacement y_s is expressed in terms of other DOF of the sprung masses, as seen in equation (1).

$$m_i \ddot{y}_i + \frac{d_{io}}{wb} \left[k_{io} \left(\left(1 - \frac{d_{io}}{wb} \right) y_{io} + \frac{d_{io}}{wb} y_i - y_T - b_{io} \theta_T - a_{io} \beta_T \right) + c_{io} \left(\left(1 - \frac{d_{io}}{wb} \right) \dot{y}_{io} + \frac{d_{io}}{wb} \dot{y}_i - \dot{y}_T - b_{io} \dot{\theta}_T - a_{io} \dot{\beta}_T \right) \right] + \left(1 - \frac{d_i}{wb} \right) \left[k_i \left(\left(1 - \frac{d_i}{wb} \right) y_i + \frac{d_i}{wb} y_{io} - y_T - b_i \theta_T - a_i \beta_T \right) + c_i \left(\left(1 - \frac{d_i}{wb} \right) \dot{y}_i + \frac{d_i}{wb} \dot{y}_{io} - \dot{y}_T - b_i \dot{\theta}_T - a_i \dot{\beta}_T \right) \right] + kt_i (y_i - r_i) + ct_i (\dot{y}_i - \dot{r}_i) = 0$$

(7)

$$\begin{aligned}
& m_i \ddot{y}_i + \frac{d_{io}}{wb} \left[k_{io} \left(\left(1 - \frac{d_{io}}{wb} \right) y_{io} + \frac{d_{io}}{wb} y_i - y_T - h_1 \theta_T - (h_3 + b_{io}) \theta_S - a_{io} \beta_S \right) \right. \\
& \quad \left. c_{io} \left(\left(1 - \frac{d_{io}}{wb} \right) \dot{y}_{io} + \frac{d_{io}}{wb} \dot{y}_i - \dot{y}_T - h_1 \dot{\theta}_T - (h_3 + b_{io}) \dot{\theta}_S - a_{io} \dot{\beta}_S \right) \right] + \\
& \quad \left(1 - \frac{d_i}{wb} \right) \left[k_i \left(\left(1 - \frac{d_i}{wb} \right) y_i + \frac{d_i}{wb} y_{io} - y_T - h_1 \theta_T - (h_3 + b_i) \theta_S - a_i \beta_T \right) \right. \\
& \quad \left. c_i \left(\left(1 - \frac{d_i}{wb} \right) \dot{y}_i + \frac{d_i}{wb} \dot{y}_{io} - \dot{y}_T - h_1 \dot{\theta}_T - (h_3 + b_i) \dot{\theta}_S - a_i \dot{\beta}_T \right) \right] + kt_i (y_i - r_i) + \\
& \quad ct_i (\dot{y}_i - \dot{r}_i) = 0 \quad (8)
\end{aligned}$$

2.1 Matrix formulation

Using the symbols given in the nomenclature appendix, the equations of motion (2-8) of the vehicle can be expressed in matrix form as:

$$\mathbf{M} \ddot{\mathbf{z}} + \mathbf{C} \dot{\mathbf{z}} + \mathbf{K} \mathbf{z} = \mathbf{f} \quad (9)$$

where the DOF's are given by:

$$\mathbf{z} = (y_T \quad \theta_T \quad \beta_T \quad \theta_S \quad \beta_S \quad y_1 \quad \cdots \quad y_i)^T \text{ for } i = 1, 2, \dots, N \quad (10)$$

The symmetric mass matrix is given by:

$$\mathbf{M} = \begin{pmatrix} \mathbf{M1} & 0 \\ 0 & \mathbf{M2} \end{pmatrix} \quad (11)$$

where the submatrices $\mathbf{M1}$ and $\mathbf{M2}$ represent the mass matrices associated to the DOFs of the sprung and unsprung masses respectively and they are defined in equations (12,13).

$$\mathbf{M1} = \begin{pmatrix} m_T + m_S & m_S h_1 & 0 & m_S h_3 & 0 \\ & I_{Ty} + m_S h_1^2 + m h_2^2 & 0 & m_S h_1 h_3 - m h_2 h_4 & 0 \\ & & I_{Tx} & 0 & 0 \\ & Symm. & & I_{Sy} + m_S h_3^2 + m h_4^2 & 0 \\ & & & & I_{Sx} \end{pmatrix} \quad (12)$$

$$\mathbf{M2} = \begin{pmatrix} m_1 & \cdots & 0 & \cdots & 0 \\ & \ddots & \vdots & & \vdots \\ & & m_i & \cdots & 0 \\ & Symm. & & \ddots & \vdots \\ & & & & m_N \end{pmatrix} \quad (13)$$

where m is an auxiliary variable defined in equation (14).

$$m = \frac{(m_T + \sum_T m_i)(m_S + \sum_S m_i)}{m_T + m_S + \sum_T m_i + \sum_S m_i} \quad (14)$$

Note that the summation of matrix elements with subscripts T and S indicates the addition of corresponding parameters for tractor and trailer respectively.

The stiffness matrix is given by:

$$\mathbf{K} = \begin{pmatrix} \mathbf{K1} & -\mathbf{K2} \\ -\mathbf{K2}^T & \mathbf{K3} \end{pmatrix} \quad (15)$$

where the submatrices $\mathbf{K1}$ and $\mathbf{K2}$ are defined in equations (16, 17).

$\mathbf{K1}$

$$= \begin{pmatrix} \sum k_i & \sum_T b_i k_i + h_1 \sum_S k_i & \sum_T a_i k_i & \sum_S (h_3 + b_i) k_i & \sum_S a_i k_i \\ & \sum_T b_i^2 k_i + h_1^2 \sum_S k_i & \sum_T a_i b_i k_i & h_i \sum_S (h_3 + b_i) k_i & h_1 \sum_S a_i k_j \\ & & \sum_T a_i^2 k_i & 0 & 0 \\ & Symm. & & \sum_S (h_3 + b_i)^2 k_i & \sum_S a_i (h_3 + b_i) k_i \\ & & & & \sum_S a_i^2 k_i \end{pmatrix}$$

(16)

K2

$$= \begin{pmatrix} k_1 & \cdots & k_i & \cdots & k_T & k_{T+1} & \cdots & k_{T+j} & \cdots & k_N \\ b_1 k_1 & \cdots & b_i k_i & \cdots & b_T k_T & h_{T+1} k_{T+1} & \cdots & h_{T+j} k_{T+j} & \cdots & h_N k_N \\ a_1 k_1 & \cdots & a_i k_i & \cdots & a_T k_T & 0 & \cdots & 0 & \cdots & 0 \\ 0 & \cdots & 0 & \cdots & 0 & (h_3 + b_{T+1}) k_{T+1} & \cdots & (h_3 + b_{T+j}) k_{T+j} & \cdots & (h_3 + b_N) k_N \\ 0 & \cdots & 0 & \cdots & 0 & a_{T+1} k_{T+1} & \cdots & a_{T+j} k_{T+1} & \cdots & a_N k_N \end{pmatrix} \quad (17)$$

The **K3** submatrix is defined element by element obtaining a symmetric matrix using equations (18) and (19), where the subscript notation io is used for parameters that correspond to the i^{th} opposite wheel.

$$\mathbf{K3}(i, i) = \left(1 - \frac{d_i}{wb}\right)^2 k_i + \left(\frac{d_{io}}{wb}\right)^2 k_{io} + kt_i \quad \text{For } i = 1, 2, \dots, N \quad (18)$$

$$\mathbf{K3}(i, io) = \left(1 - \frac{d_i}{wb}\right) \frac{d_i}{wb} k_i + \left(1 - \frac{d_{io}}{wb}\right) \frac{d_i}{wb} k_{io} \quad \text{For } i = 1, 2, \dots, N \quad (19)$$

where wb is defined in equation (20) for a three-dimensional model, whereas for a planar model the unity value has to be adopted.

$$wb = a_i + a_{i0} \quad (20)$$

The damping matrix, **C**, has an identical format to the stiffness matrix and can be found by substituting k for c in the components of equation (15), as can be seen in equations (21-25).

$$\mathbf{c} = \begin{pmatrix} \mathbf{c1} & -\mathbf{c2} \\ -\mathbf{c2}^T & \mathbf{c3} \end{pmatrix} \quad (21)$$

C1

$$= \begin{pmatrix} \sum c_i & \sum_T b_i c_i + h_1 \sum_S c_i & \sum_T a_i c_i & \sum_S (h_3 + b_i) c_i & \sum_S a_i c_i \\ & \sum_T b_i^2 c_i + h_1^2 \sum_S c_i & \sum_T a_i b_i c_i & h_i \sum_S (h_3 + b_i) c_i & h_1 \sum_S a_i c_j \\ & & \sum_T a_i^2 c_i & 0 & 0 \\ & \text{Symm.} & & \sum_S (h_3 + b_i)^2 c_i & \sum_S a_i (h_3 + b_i) c_i \\ & & & & \sum_S a_i^2 c_i \end{pmatrix} \quad (22)$$

C2

$$= \begin{pmatrix} c_1 & \cdots & c_i & \cdots & c_T & c_{T+1} & \cdots & c_{T+j} & \cdots & c_N \\ b_1 c_1 & \cdots & b_i c_i & \cdots & b_T c_T & h_{T+1} c_{T+1} & \cdots & h_{T+j} c_{T+j} & \cdots & h_N c_N \\ a_1 c_1 & \cdots & a_i c_i & \cdots & a_T c_T & 0 & \cdots & 0 & \cdots & 0 \\ 0 & \cdots & 0 & \cdots & 0 & (h_3 + b_{T+1}) c_{T+1} & \cdots & (h_3 + b_{T+j}) c_{T+j} & \cdots & (h_3 + b_N) c_N \\ 0 & \cdots & 0 & \cdots & 0 & a_{T+1} c_{T+1} & \cdots & a_{T+j} c_{T+1} & \cdots & a_N c_N \end{pmatrix} \quad (23)$$

$$\mathbf{C3}(i, i) = \left(1 - \frac{d_i}{wb}\right)^2 c_i + \left(\frac{d_{io}}{wb}\right)^2 c_{io} + ct_i \quad \text{For } i = 1, 2, \dots, N \quad (24)$$

$$\mathbf{C3}(i, io) = \left(1 - \frac{d_i}{wb}\right) \frac{d_i}{wb} c_i + \left(1 - \frac{d_{io}}{wb}\right) \frac{d_i}{wb} c_{io} \quad \text{For } i = 1, 2, \dots, N \quad (25)$$

The force vector, \mathbf{f} is given by:

$$\mathbf{f} = (0 \quad 0 \quad 0 \quad 0 \quad 0 \quad ct_1 \dot{r}_1 + kt_1 r_1 \quad \cdots \quad ct_i \dot{r}_i + kt_i r_i \quad \cdots \quad ct_N \dot{r}_N + kt_N r_N)^T$$

For $i = 1, 2, \dots, N \quad (26)$

At time, $t = 0$, assuming the vehicle is at rest, the initial values for the vector \mathbf{z} can be obtained by solving the static problem in equation (9), this is, multiplying the inverse stiffness matrix by \mathbf{f} at $t = 0$.

3. Discussion

The equations above consider only vehicle dynamics. The static load can be added to the calculated contact force or included in the force vector f , with some rearrangements of the initial conditions. Moreover, the equations can be extended to include a towed trailer. The towed element might be described, following the presented equations, as a truck without trailer moving at the same speed as the primary vehicle, assuming there is no relation between degrees of freedom (Figure 3).

Tyre damping has been included in the equations with the intention to represent a more general vehicle model. However, tyre viscous damping is generally small and can be ignored in predictions of vehicle response to road roughness [26].

Recommended parameters values for the suspension can be found in [27], where the results of an extensive suspension database analysis are presented. Lehtonen et al. [28] show experimentally obtained values for heavy tyres, Wong [29] presents appropriate truck tyre parameters, and Kirkegaard et al. [15] provide values recommended by a heavy goods vehicle manufacturer. Other parameters sources are Harris et al. [14], Kim et al. [12], Gillespie et al. [30] for articulated trucks, Fafard et al. [18] for articulated truck with towed trailer, and Li [31] for crane suspensions.

Finally, these vehicle equations can be combined with the equations of the infrastructure model under investigation to analyse vehicle-infrastructure problems, i.e., impact factor due to traffic in roads and bridges [6-17,32], dynamics in railway bridges [2, 3], pavement deterioration due to the passage of heavy vehicles [33-34], performance of vehicle elements such as suspensions or tyres [1, 36-39], evaluation of ride quality and pavement unevenness [40-42], or weigh-in-motion applications [43-45] amongst others. In the case of simulating the interaction between a vehicle and a

bridge, Lagrange multipliers [17], dynamic condensation [3] or iterative procedures [31] are some of the most popular approaches to combine the equations of motion of both models.

Acknowledgment

The authors would like to express their gratitude for the financial support received from the 6th European Framework Project ARCHES (Assessment and Rehabilitation of Central European Highway Structures) towards this investigation.

References

- 1 **Cebon, D.** Handbook of vehicle-road interaction, Sewts & Zeitlinger, Lisse, the Netherlands, 1999.
- 2 **Frýba, L.** Vibration of solids and structures under moving loads, Thomas Telford, London, 1999.
- 3 **Yang, Y.B., Yau, J.D. and Wu, Y.S.** Vehicle-bridge interaction dynamics: with applications to high-speed railways, World scientific, Singapore, 2004.
- 4 **Hilal, M.A. and Zibdeh H.S.** Vibration analysis of beams with general boundary conditions traversed by a moving force. *J. Sound Vib.*, 2000, **229**(2), 377-388.
- 5 **Savin, E.** Dynamic amplification factor and response spectrum for the evaluation of vibrations of beams under successive moving loads. *J Sound Vib.*, 2001, **248**(2), 267-288.
- 6 **Brady, S.P. and OBrien, E.J.** Effect of vehicle velocity on the dynamic amplification of two vehicles crossing a simply supported bridge. *J. Bridge Eng.*, 2006, **11**(2), 250-256.

- 7 **González, A. and OBrien, E.J.** The use of functional networks to optimise the accuracy of multiple-sensor weigh-in-motion systems. *Fourth International Conference on Weigh-In-Motion (ICWIM4)*, 2005, Taipei, Taiwan.
- 8 **Li, Y., OBrien, E.J. and González, A.** The development of a dynamic amplification estimator for bridges with good road profiles. *J. Sound Vib.*, 2006, **293**(1-2), 125-137.
- 9 **Seetapan, P. and Chucheeepsakul, S.** Dynamic response of a two-span beam subjected to high speed 2DOF sprung vehicles. *Int. J. Struct. Stability Dyn.*, 2006, **6**(3), 413-430.
- 10 **Yang, Y.B., Hung, C.H. and Yau, J.D.** An element for analysing vehicle-bridge systems considering vehicle's pitching effect. *Int. J. Num. Meth. Eng.*, 1999, **46**, 1031-1047.
- 11 **OBrien, E.J., Li, Y. and González, A.** Bridge roughness index as an indicator of bridge dynamic amplification. *Comp. Struct.*, 2006, **84**, 759-769.
- 12 **Kim, C.W., Kawatani, M. and Kim, K.B.** Three-dimensional dynamic analysis for bridge-vehicle interaction with roadway roughness. *Comp. Struct.*, 2005, **83**, 1627-1645.
- 13 **Pesterev, A.V., Yang, B., Tan, C.A. and Bergman, L.A.** Assessment of pothole-induced tire forces in a general linear vehicle model. *16th ASCE Engineering Mechanics Conference*, 2003, Seattle. Available at <http://www.ce.washington.edu/em03/proceedings/>
- 14 **Harris, N.K., OBrien, E.J. and González, A.** Reduction of bridge dynamic amplification through adjustment of vehicle suspension damping. *J. Sound Vib.*, 2007, **302**(3), 471-485.

- 15 **Kirkegaard, P.H., Nielsen, S.R.K., and Enevoldsen, I.** Heavy vehicles on minor highway bridges - Dynamic modelling of vehicles and bridges. Aalborg Univeristy, Instituttet for Bygningsteknik, 1997.
- 16 **Wang, T.L. and Huang, D.** Dynamic response of continuous beam bridges and slant-legged rigid frame bridges. Florida International University, Department of Civil and Environmental Engineering, 1992.
- 17 **González, A., Rattigan, P., OBrien, E.J. and Caprani, C.** Determination of bridge lifetime DAF using finite element analysis of critical loading scenarios. *Eng. Struct.*, 2008, **30**(9), 2330-2337.
- 18 **Fafard, M., Bennur, M. and Savard, M.** A general multi-axle vehicle model to study the bridge-vehicle interaction. *Eng. Computations*, 1997, **14**(5), 491-508.
- 19 **Kwasniewski, L., Li, H., Wekezer, J. and Malachowski, J.** Finite element analysis of vehicle-bridge interaction. *Fin. Elem. Analy. Design.*, 2006, **42**, 950-959.
- 20 **Green, M.F. and Cebon, D.** Dynamic interaction between heavy vehicles and highway bridges, *Comp. & Struct.*, 1997, **62**(2), 253-264.
- 21 **Tedesco, J.W., McDougal, W.G. and Ross, C.A.** Structural dynamics, theory and applications. Addison-Wesley, California, 1999.
- 22 **Weaver, W. Jr. and Johnston, P.R.** Structural dynamics by finite elements, Prentice-Hall, Englewood cliffs, NJ, 1986.
- 23 **Bathe, K.J. and Wilson, E.L.** Numerical methods in finite element analysis, Prentice-Hall, Englewood cliff, NJ, 1976.

- 24 **Trujillo, D.M.** The direct numerical integration of liner matrix differential equations using Padé approximations. *Int. Jour. Num. Meth. Eng.*, 1975, **9**(3), 259-270.
- 25 **ElMadany, M.M.** Design optimization of truck suspensions using covariance analysis. *Comp. Struct.*, 1988, **28**(2), 241–246.
- 26 **Cole, D.J.** and **Cebon, D.** Truck tires, suspension design and road damage. *International Rubber Conference IRC96*, 1996, Manchester, United Kingdom. Available at http://www-mech.eng.cam.ac.uk/trg/publications/downloads/veh_road/
- 27 **Fu, T.T.** and **Cebon, D.** Analysis of a truck suspension database, *Int. J. Heavy Veh. Syst.*, 2002, **9**(4), 281-297.
- 28 **Lehtonen, T., Kaijalainen, O., Pirjola, H.** and **Juhala, M.** Measuring stiffness and damping properties of heavy tyres. *Society of automotive engineers of Japan*, 2006.
- 29 **Wong, J.Y.** Theory of ground vehicles, John Wiley & sons, 1993.
- 30 **Gillespie, T.D., MacAdam, C.C., Hu, G.T., Bernard, J.E.** and **Winkler, C.B.** Simulation of the Effects of Increased Truck Size and Weight. University of Michigan, Highway Safety Research Institute, 1979.
- 31 **Li, H.** Dynamic response of highway bridges subjected to heavy vehicles, Ph.D. diss., Florida state University, 2005. Available at <http://etd.lib.fsu.edu/theses/available/etd-11092005-171029/>
- 32 **Nassif, H.H.** and **Liu, M.** Analytical modelling of bridge-road-vehicle dynamic interaction system. *J. Vib. Control*, 2004, **10**(2), 215-241.

- 33 **Collop, A.C., Cebon, D. and Cole, D.J.** Effects of spatial repeatability on long-term pavement performance. *Proc. Inst. Mech. Eng.*, 1996, **210**(2), 97-110.
- 34 **Cole, D.J. and Cebon, D.** Influence of tractor-trailer interaction on assessment of road damaging performance. *Proc. Inst. Mech. Eng.*, 1998, **212**, 1-10.
- 35 **Gillespie, T.D., Karamihas S.M., Cebon, D., Sayers, M.W., Nasim, M.A., Hansen, W. and Ehsan, N.** Effects of heavy vehicle characteristics on pavement response and performance. University of Michigan, Transportation Research Institute, 1992.
- 36 **Cole, D.J. and Cebon, D.** Front-rear interaction in a pitch-plane truck model. *Veh. Sys. Dyn.*, 1998, **30**, 117-141.
- 37 **Cole, D.J. and Cebon, D.** Spatial repeatability of dynamic tyre forces generated by heavy lorries. *Proc. Inst. Mech. Eng.*, 1992, **206**, 17-27.
- 38 **Cole, D.J. and Cebon, D.** Truck suspension design to minimize road damage. *Proc. Inst. Mech. Eng.*, 1996, **210**(2), 95-107.
- 39 **Green, M.F., Cebon, D. and Cole, D.J.** Effects of vehicle suspension design on dynamics of highway bridges. *ASCE Struct. Eng.*, 1995, **121**(2), 272-282.
- 40 **Prem, H. and Ayton, G.** Improved techniques for assessing ride quality on concrete pavements. *International conference on concrete pavements*, 2005, Colorado Springs, Colorado, USA.
- 41 **Harris, N.K., Gonzalez, A. and OBrien, E.J.** Characterisation of pavement profile heights using accelerometer readings. *J. Sound Vib.*, 2009, accepted for publication 25-Septembre.
- 42 **Imine, H., Delanne, Y. and M'Sirdi, N.K.** Road profile input estimation in vehicle dynamics simulation. *Veh. Sys. Dyn.*, 2006, **44**, 285-303.

- 43 **Belay, A., OBrien, E.J. and Kroese, D.** Truck Fleet Model for Design and Assessment of Flexible Pavements. *J. Sound Vib.*, 2008, **311**, 1161-1174.
- 44 **Wilson, S.P., Harris, N.K. and OBrien, E.J.** The use of Bayesian Statistics to predict patterns of spatial repeatability. *Transp. Research*, 2006, **14** (5), 303-315.
- 45 **Gonzalez, A., Rowley, C. and OBrien, E.J.** A general solution to the identification of moving vehicle forces on a bridge. *Int. J. Num. Meth. Eng.*, 2008, **75**(3), 335-354.

Appendix 1. Nomenclature

a_i, b_i	X and Y coordinate for wheel i from its corresponding sprung mass centre of gravity	m_i	unsprung mass for wheel i
c_i	suspension viscous damping coefficient for wheel i	m_T, m_S	tractor and trailer sprung mass
ct_i	tyre viscous damping coefficient for wheel i	M	mass matrix
C	damping matrix	M1, M2	submatrix of M
C1, C2, C3	submatrix of C	nT, nS	number of tractor and trailer wheels
d_i	suspension offset for wheel i	N	total number of wheels
f	force vector	r_i	road profile under wheel i
h_1, h_2	horizontal and vertical distance from articulation to tractor centre of gravity	t	time
h_3, h_4	horizontal and vertical distance from articulation to trailer centre of gravity	wb	wheelbase on Y direction
h_5	horizontal distance from tractor centre of gravity to the front wheel	y_i	vertical displacement of wheel i
I_{Sx}, I_{Sy}	trailer moment of inertia about X and Y axis	y_T	tractor vertical displacement
I_{Tx}, I_{Ty}	tractor moment of inertia about X and Y axis	y_S	trailer vertical displacement
k_i	suspension stiffness coefficient for wheel i	z	degrees of freedom vector
kt_i	tyre stiffness coefficient for wheel i	X, Y, Z	coordinates
K	stiffness matrix	β_T, β_S	tractor and trailer roll angle

K1,K2,K3	submatrix of K	θ_T, θ_S	tractor and trailer pitch angle
m	auxiliary mass		




Figure 1(a) Suspension and tyre system.

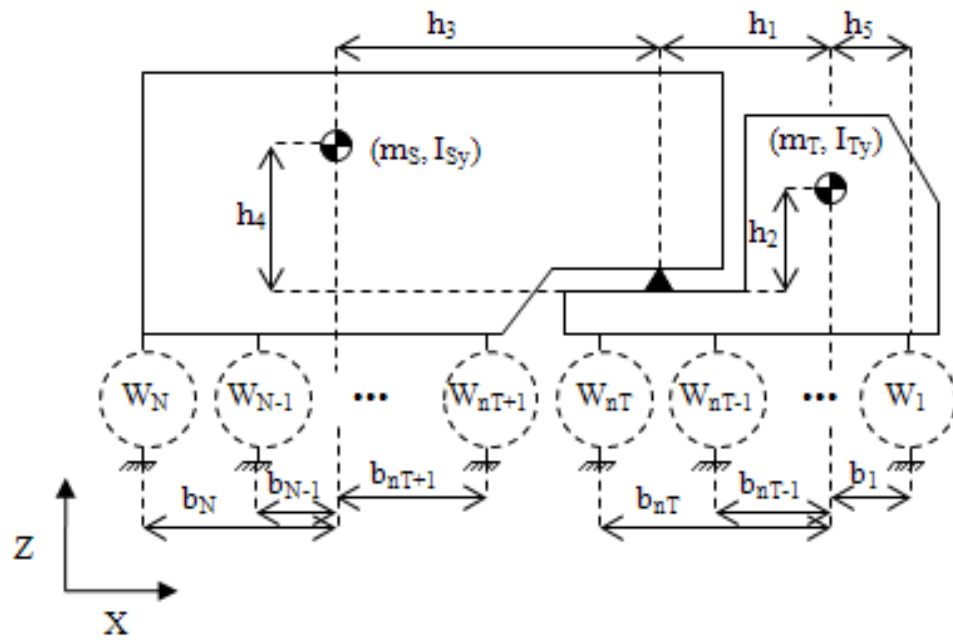


Figure 1(b) Side view sketch of Tractor + Trailer.

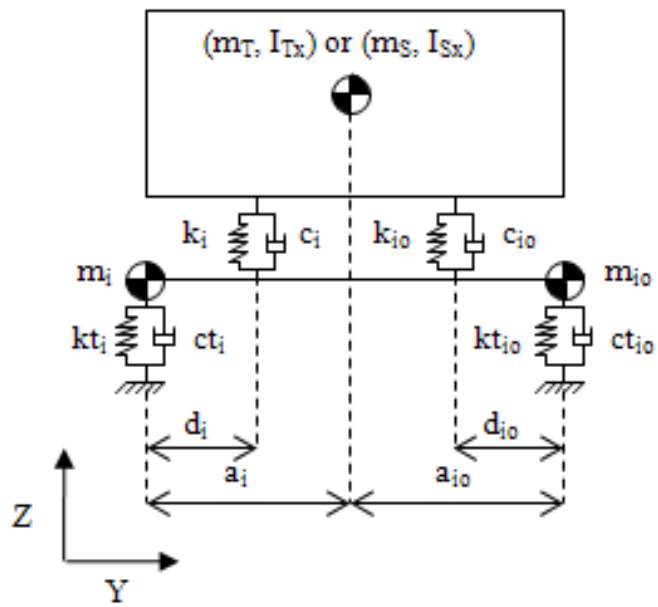


Figure 2. Front view for axle i (For 3 dimensional solution only).

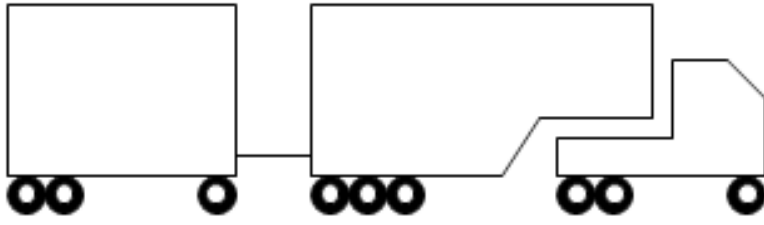


Figure 3. Addition of towed vehicle.